




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ : G06K 7/10		A1	(11) International Publication Number: WO 94/27246
			(43) International Publication Date: 24 November 1994 (24.11.94)
(21) International Application Number: PCT/US94/05000		(81) Designated States: AT, AU, BB, BG, BR, BY, CA, CH, CZ, DE, DK, ES, FI, GB, HU, JP, KP, KR, KZ, LK, LU, MG, MN, MW, NL, NO, NZ, PL, PT, RO, RU, SD, SE, SK, UA, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 6 May 1994 (06.05.94)			
(30) Priority Data: 08/059,796 10 May 1993 (10.05.93) US			
(71) Applicant: PSC, INC. [US/US]; 770 Basket Road, Webster, NY 14580 (US).		Published With international search report.	
(72) Inventors: CLARK, Timothy, J.; 589 Brambles Way, Orange, CA 92669 (US). ANSARI, Shoeb; Apartment 30, 14321 Brookhurst, Garden Grove, CA 92643 (US).			
(74) Agent: LUKACHER, Martin; Suite 1000, Clinton Square, Rochester, NY 14604 (US).			

(54) Title: BAR CODE DECODING SYSTEM

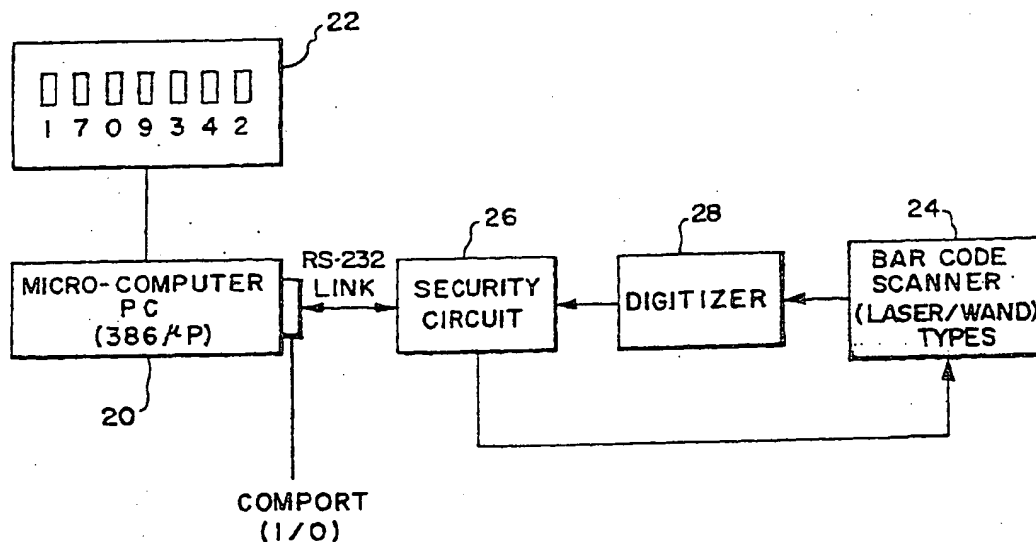

(57) Abstract

The system includes a bar code scanner (24), digitizer (28), security circuit (26), general purpose computer (20), and a screen (22). The scanner (24) communicates with the computer (20) over a serial communications link utilizing the serial I/O port of the computer (20). The security circuit (26) prevents unauthorized transfer of data into and out of the microcomputer (20). Both signals representing the data which is scanned and signals representing commands to the scanner (24) and commands from the scanner (24) indicative of the status thereof are communicated over a plurality of lines in the communications link. Appropriate interrupts are generated to actuate the scanner (24) and to respond to the data. The microcomputer (20) translates the data which represents the width of each bar and the number of bars and the detection of the end of a bar code symbol into digital values which are stored in memory and presented for decoding in accordance with programming of the microcomputer (20) which decodes the symbol.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

BAR CODE DECODING SYSTEM

Description

5 The present invention relates to a system for enabling decoding of bar codes and other symbols with a digital microcomputer which communicates with the device which scans the symbol (referred to herein as a scanner) over the communications port of the computer which is referred to
10 sometimes as the COMPORT. The invention relates more particularly to a system for receiving interrupts from a scanner to enable signals representing the symbol to be used in the computer for decoding the data into corresponding characters and for other purposes, such as reformatting for
15 transmission and display of the characters, of characteristics of the symbol, and of its graphical representation.

 The invention is especially suitable for use with bar code scanners of the type called laser scanners or just "laser", wherein a laser beam is scanned across the code and
20 light returned from the code during scanning is translated into data representing electrical signals in the form of pulses of varying widths corresponding to the bars of the code. The term "bars" as used herein includes relatively opaque or black bars and relatively reflective or white bars.
25 The invention may be used with scanners of the wand type which are moved across the bar code while in contact or in close proximity therewith, either manually or by devices which move the wand or the item having the code thereon. The invention may also find application with other types of scanners such as
30 solid state or CCD (charge coupled photoelectric device) scanners. Magnetic strip scanners may also be connected to the COMPORT and, like the laser, wand or other optical scanners, use the computer as a platform for decoding or other data processing. The invention may be practiced with various
35 microcomputers which have COMPORTs. The computers may utilize different micro processor chips, such as the 386 or 486 chips. The computers may be desktop computers, workstation computers or laptop computers.

The invention makes use of the serial communications facilities of the computer, in particularly the facility which is available at a multipin connector which is known as the COMPORT. This port may operate in accordance with the RS-232 protocol and is sometimes called the RS-232 communications port. The port is known by other names. IBM calls it the asynchronous communications adapter. The COMPORT uses special addressing space in the computer which is reserved for input/output (I/O) ports. By reading or writing to the assigned I/O port address (often called "port addresses"), the computer can control the COMPORT, read its status and read and write data bytes to and from the COMPORT hardware. This hardware is usually a UART (Universal Asynchronous Receiver/Transmitter). The UART contains the registers for the commands and data. A computer may have several COMPORTS for mouse devices or even computer game controls, such as a joystick device. The COMPORT has a way to indicate to the computer that it needs attention using a signal which "interrupts" the computer from whatever it may have been doing to tell it that the COMPORT has information the computer should process. The "interrupt" enables the computer to process data which is actually present so that it can perform other data processing tasks.

The system provided by the present invention is operative to generate the appropriate interrupts so that the computer can process data from the scanner. The computer then may be used as a platform for translating the data into a form for decoding or for other purposes. The computer is responsive to interrupts for receiving commands from the scanner and for generating commands to the scanner. In the case of a laser scanner, commands from the scanner which require attention are trigger actuations. These result in commands to commence scanning by enabling the scanner motor to operate and the laser to produce the laser beam. Other commands which are transmitted may be the good read command, which is either a visual or audible signal that a symbol (a bar code) has been properly decoded.

The invention thus combines a scanner with a computer so that the computer operates as a platform for controlling the scanner and processing data which represents symbols being scanned, which data is received from the scanner. The invention also permits the communications port of the computer to be used, and particularly the lines which carry signals for communications in accordance with the RS-232 protocol, which is a serial communications protocol in wide use. The invention permits the DTR (data terminal ready) line to be used to handle a laser enable command to the scanner. The CTS or clear to send line may be used for data representing the symbol (pulses of different width for the white or black bars in the case of a bar code). The RTS line may be used to send a command that the code has been properly decoded (for illuminating the good read LED or acoustic symbol). The carrier detect line may be used to carry the trigger commands from the scanner to the computer. Power may be carried from the scanner to the computer over one of the lines so that the scanner may be powered with operating voltage from the computer.

Another feature of the invention is that it provides facilities using the communications port for a security device which will prevent transfer of data into or out of the computer by unauthorized personnel who do not have a proper security device.

The invention, therefore, stated briefly, provides a system for processing data from a scanner representing symbols which are read by the scanner for decoding the information contained in the data. The system uses a digital microcomputer having a communications port for receiving the data via a communications link between the scanner and the port. The computer provides means, due to its programming, which is responsive to communications over the link indicating that the scanner is in communicating relationship with the computer over the link and that the computer is ready to decode the data. The computer is also programmed to provide means for transmitting and receiving commands necessary for

controlling the scanner and also for translating the data into a format for decoding.

5 The foregoing and other advantages, features and objects of the invention will become more apparent from a reading of the following description in connection with the accompanying drawings in which:

FIG. 1 is a block diagram of a system for enabling decoding of bar codes with a digital microcomputer which embodies the invention;

10 FIG. 2 is a schematic diagram indicating the lines of the communication port and link in accordance with the RS-232 protocol and circuitry which provides security against unauthorized access to the computer; and

15 FIG. 3 is a flow chart showing the structure of the programming of the computer in order to enable its use as a platform for processing data representing bar code symbols and for controlling a bar code scanner.

Referring to FIG. 1, there is shown a microcomputer 20 which may be a general purpose desktop personal computer (PC) with a type 386 microprocessor chip. This microcomputer is associated with a display or screen 22. This display may be driven by the microcomputer 20 and provides a graphic display of the bar code symbol which is read by a bar code scanner 24. This code contains information representing a numeral. Both the numeral and the bars of the code are 25 entirely arbitrary and are not intended to be for a code in accordance with any standard symbology. The white and black bars are shown on the graphic display. The white bars are sometimes referred to as spaces. The numerical value "179342" on the display is the result of decoding of the data 30 representing the bar code in the microcomputer 20.

The microcomputer has a COMPORT which is an I/O port and may have an arrangement of pins in accordance with the RS-232 protocol. These pins are nine in number. They are 35 connected to lines on a cable or communications linked to the scanner via a security circuit 26. The scanner may include a digitizer 28, which provides the data representing signals in

the form of pulses of varying width corresponding to the width of the bars of the code. Such a bar code scanner and the digitizing circuit used may be of the type described in U.S. Patent 5,200,597 issued April 6, 1993 to J.M. Eastman, et al.

5 As shown in FIG. 2, only the 9th pin or VCC line and pins 1, 4, 6, 7 and 8 of the COMPORT are used in the practice of the herein illustrated embodiment of the invention. Other lines may be used, for example, the TX line to pin 2 of the COMPORT and the RX line to pin 3 of the COMPORT. These pins
10 may provide for alternative communication, say, for example, for data from and to a keyboard or data entry device which is used in conjunction with a bar code scanner for gathering inventory and stock information in factories and warehouses.

The security circuit includes electronic components
15 for handling the data and commands, as well as a security counter 28, which reads the request to send (RTS) input from the computer. When that input is a predetermined sequence as determined by the inputs to the counter, A, B, C, D, P and T, and that sequence represents a predetermined or preset code
20 stored in the counter chip 28, an enable output B (pin 13) is applied to not preset enable (not PE) and an output D (pin 11) is applied to the dataset ready (DSR) line. This enables the transfer of data to and from the microcomputer 20 and prevents unauthorized access thereto.

25 The other RS-232 lines which are used are the CTS or clear to send which handles the output from the digitizer 28 (the variable width pulses) which are relayed via a transistor 32 to the COMPORT. The DTR or data terminal ready is an output from the COMPORT which carries laser enable commands.
30 The RTS line is used for the good read enable command which, in the scanner illustrated in the Eastman, et al. patent, illuminates an LED or light emitting diode, which indicates to the operator that a bar code symbol has been successfully decoded. The carrier detect line to pin 1 of the COMPORT
35 carries the command indicating that the laser scanner's trigger has been pulled. The signal representing the command

results from a switch closure as explained in the Eastman, et al. patent.

The structure of the program which enables the computer 20 to be a platform for the scanner 24 is illustrated in the flow chart of FIG. 3. The program is called an interrupt service routine (ISR). The interrupts are caused by various events, such as decoder availability, white to black or black to white transitions and trigger actuations and releases in the case of a laser beam scanner. The first decision occurs upon a scan or check in a UART register in which data representing decoder availability is stored, for the COMPORT which is connected via the link to the scanner, to verify that the interrupt was generated by the decoding process in the computer. If the interrupt did not come from the decoding process or if the status of the register indicates that the scanner is not connected to the COMPORT, control is passed or changed to another interrupt service routine indicated by the block labelled chain to old ISR. Then, another ISR (the old ISR) proceeds so that the computer can perform other tasks. If it was the scanner that generated the interrupt, the program continues to the second decision. The second and third decisions are provided so that a laser scanner can be serviced. If a wand is used, the second and third decisions will be in the negative and the program proceeds to the fourth decision. When the laser scanner is connected to the COMPORT, a command on the carrier detect line generates an interrupt, if any activity takes place at the trigger. If the command indicates that the trigger was pressed on, the laser and its motor which oscillates a scanning mirror and deflects the beam to scan the code, are turned on.

In the third step, the trigger command is again checked to see if the trigger was pressed off or released. If the decision is in the affirmative, the laser is powered down. Affirmative results in the second and third steps directly exit the routine and the next interrupt becomes operative. The next interrupt is due to a change in the "color" or

opaqueness or reflectivity of the bars. If there is a transition from white to black (or black to white for a "negative" decoder) the interrupt is detected and the program proceeds to the fifth step.

5 The computer, has a software counter, called a bar counter which counts both the black and white bars for determining the number of bars in a code which is used in decoding to identify the symbol. In this connection, decoding may be programmed in accordance with specifications containing
10 decoding algorithms, which are published by the Automatic Identification Manufacturers Association (called "AIM"). There are specification documents for each symbology. For example, for code I2 of 5, the specification is contained in a document entitled "USS-I2 of 5". For code 39, the document is
15 identified as USS-39. These documents were available in 1986.

 Returning to the fifth process, the translation routine is initialized by setting the bar counter to zero and reading a timer chip (a hardware component in the computer) to get a reference of the start time of the bar. In the case of
20 a laser scanner, a "stop watch" counter register is used for bar width resolution. The bar width is measured by counting clock pulses in the computer between transitions from white to black or black to white. This register, called a "resolution counter", is initialized to zero for laser scanning
25 operations. The program distinguishes between laser scanners and wands due to the presence or absence of the trigger command.

 Also initialized is the quiet zone width requirement (QZR). The quiet zone is the amount of space needed on both
30 ends of the bar code so that it can be isolated for decoding. The AIM specification and similar specifications concerning UPC or uniform product codes dictate that the quiet zone be at least ten times the width of a narrow bar. The quiet zone (QZ) counter is set to zero. The counter also records the
35 time spent in a bar. In the case of a laser scanner, this counter is the same counter as the stop watch counter register.

In the sixth decision, the transition in the opposite sense (e.g., black to white) is checked. These black to white and white to black transition signals arrive from the scanner over the CTS line as shown in FIG. 2. In the case of the laser scanner, if there is no black to white transition, the seventh decision is effected by looking at the trigger command. If the trigger has been released, the laser is turned off and the routine exit is waiting for the next interrupt. This interrupt initiates the decision process as to whether the quiet zone width has been exceeded (covered). In other words, the decision determines whether the output from the scanner digitizer qualifies it to be a quiet zone. If a quiet zone is detected, the end of the symbol is indicated and the data as to bar widths and bar counts is presented for decoding in the decode bar code process (C). The bar count byte and the bar width bytes are stored in memory space in the computer's memory and presented from the memory to the decoding process.

The width of each bar is determined by the processes indicated at 10, 11 and 15, together with the process indicated at 6. In the 10th process, the presence of the next transition, from black to white in the pulse train from the digitizer, causes the reading of the counter which stores the bar width. For the wand, this is accomplished by reading the computer's timer chip and calculating the bar width resolution from the start time and the end of the bar. For the laser scanner, the bar width resolution is the value contained in the stop watch counter register. Upon each transition, the bar counter is incremented. Also, a new quiet zone requirement (QZR), is computed based on the width of the smallest bar detected as the routine executes its bar width detection loop from processes 6 to 11 to 15 and back to 6. After the bar width is recorded, the bar width resolution counter is reset to zero, where the scanner connected to the computer's COMPORT is a laser scanner.

In the 11th process, the end of the current bar is detected. If the bar end has not been detected as yet, the

12th process, which is similar to the 7th process, is carried out. In the case of the laser, the trigger input is checked to see if the laser was turned off. If the laser is not off, the program continues to the 13th and 14th processes, which
5 are similar to the 8th and 9th processes, which checks for the quiet zone being present, but if the quiet zone is not present, the resolution counter continues to be incremented so as to measure the width of the bar until the next transition which is the white to black transition. The bar width
10 measuring loop includes the 15th process which is similar to the 10th process. The bar width is recorded. For the wand, this is accomplished by reading the computer's timer chip and calculating the bar width resolution from the start time and the end time of the bar. For the laser scanner, the bar width
15 resolution is the value contained in the stop watch counter register. The bar counter is also incremented and a new QZR is calculated. When the laser scanner is connected to the COMPORT, the bar width resolution counter is also reset to zero.

20 If the quiet zone is detected (indicated at B, as it was indicated at A in the routine) the bar count and the bar width data bytes, which are recorded in the memory space of the computer, are presented for decoding. In other words, the bar widths, which are now translated into bytes, are decoded
25 in accordance with the applicable decoding algorithm. These algorithms involve detection of the symbology and comparison of various combinations of the bytes with data representing characters (letters or numerals) which the bars of the code represent, and are along the lines set forth in the AIM and/or
30 UPC specifications.

From the foregoing description, it will be apparent that there has been provided an improved system for handling and processing data representing symbols which are read by a scanner, which enables a microcomputer, of the type which is
35 generally available, to be used as a platform for decoding, reformatting, displaying and otherwise characterizing the symbol. Variations and modifications in the herein described

system, within the scope of the invention, will undoubtedly suggest themselves to those skilled in the art. Accordingly, the foregoing description should be taken as illustrative and not in a limiting sense.

Claims

1. A computer system operable as a platform for symbol reading scanners so that the computer controls a scanner and processes data from the scanner representing symbols read by the scanner for decoding the symbols into information corresponding thereto, which system comprises a general purpose computer separate from the scanner and having a communications port connectable to the scanner for receiving undecoded data representing the symbols via a communications link between the scanner and the port, means in said computer responsive to communications over said link indicating that the scanner is in data communicating relationship with said computer over said link and that said computer is ready to decode the data, means in said computer for transmitting and receiving commands necessary for the controlling of said scanner, and means for translating said data into a format for decoding.

2. The system according to Claim 1 wherein means are connected in said link for preventing unauthorized transfer of data into or out of said computer.

3. The system according to Claim 2 wherein said link has a plurality of lines, said computer has means for transmitting signals over a first of said lines and for receiving signals from said scanner over a second of said lines, said means for preventing unauthorized transfer, including means responsive to a predetermined sequence of said signals transmitted over said first line for providing an output on said second line to authorize said computer for transfer of data.

4. The system according to Claim 3 wherein said signals carried over said first line represent requests from said computer to send signals, and said computer receives signals representing readiness to receive data over said second line.

5. The system according to Claim 1 wherein said scanner is a bar code symbol scanner selected from the group


consisting of optical beam scanners which generate an optical beam which scans the bar code symbol and provides data representing the bar code in response to light returned from the bar code symbol and a wand moveable across the bar code symbol, said commands when said scanner is the optical beam scanner comprising commands from said scanner indicative of the status of said optical beam scanner and commands to said optical beam scanner to start and stop scanning, and said translating means comprising means for providing data representing the widths of bars which are opaque and reflective, and means for presenting said width representing data for decoding.

6. The system according to Claim 5 further comprising means for enabling decoding when the width representing data represents a width greater than a certain width indicative that the end of a symbol has been scanned.

7. The system according to Claim 6 further comprising means responsive to said data from said scanner for providing output data representing the number of bars in each symbol which is scanned and presenting said output data together with said width representing data for decoding.

8. The system according to Claim 1 further comprising a digitizer associated with the scanner having means for providing said undecoded data in a form representing the width of different portions of said symbol.

9. The system according to Claim 1 wherein said scanner has a trigger and said means for transmitting and receiving commands includes means in said computer automatically operative in response to manual operation of said trigger and undecoded data for controlling said scanner.

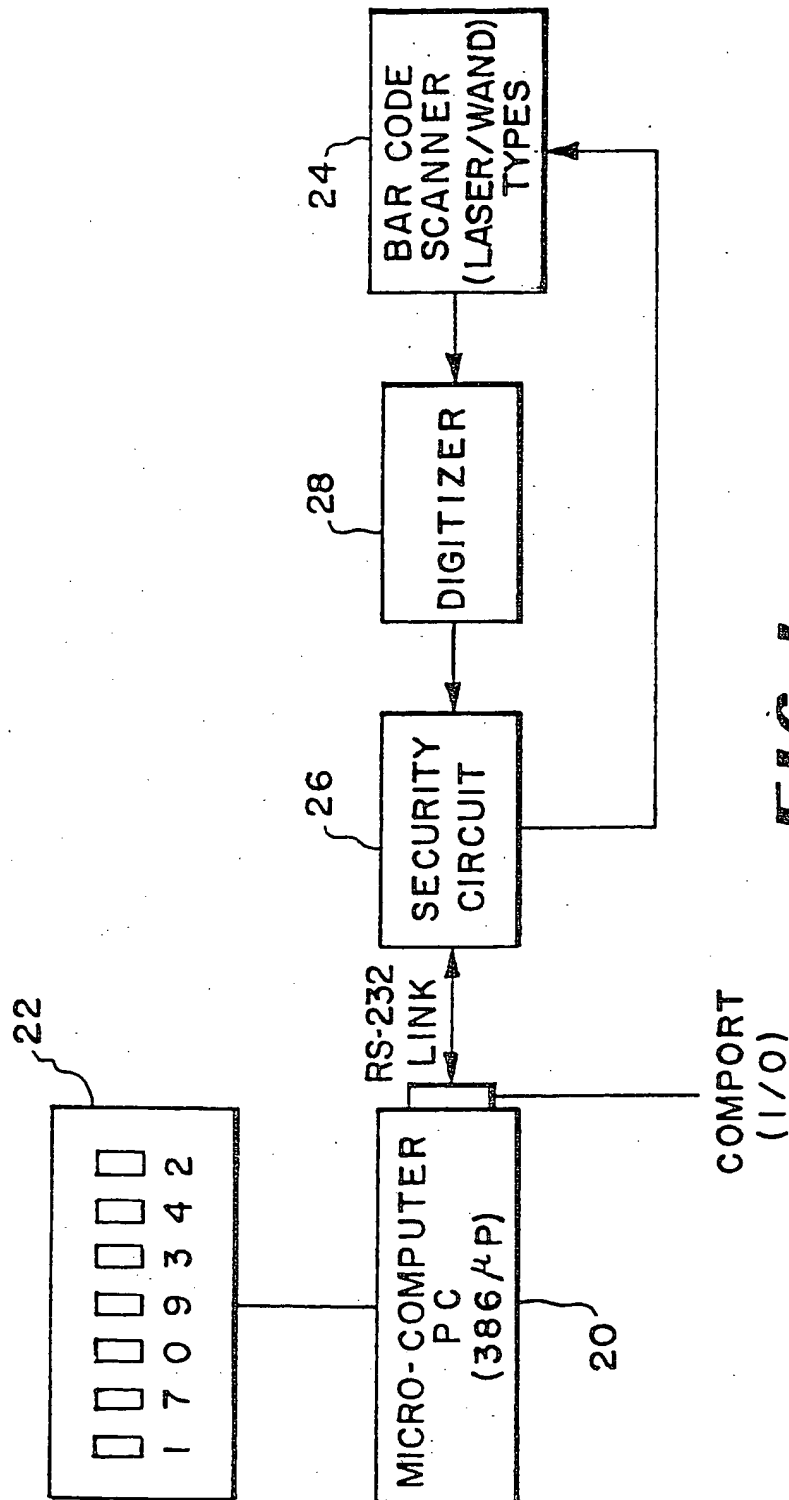**FIG. 1**

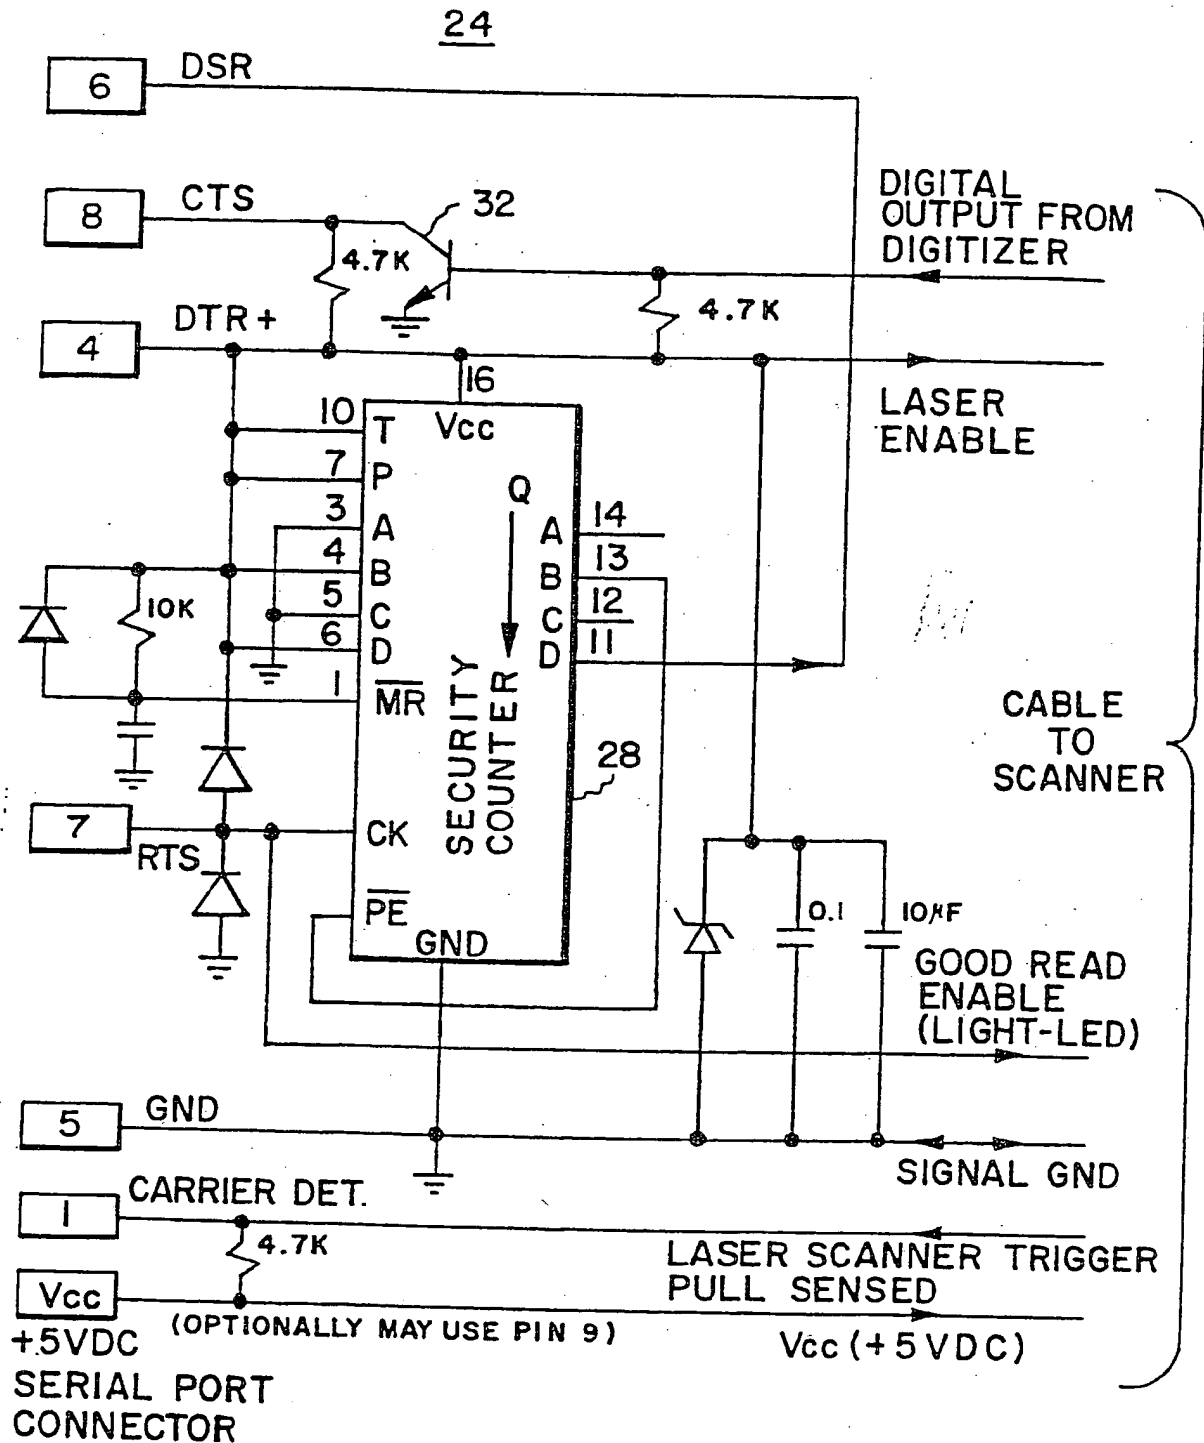
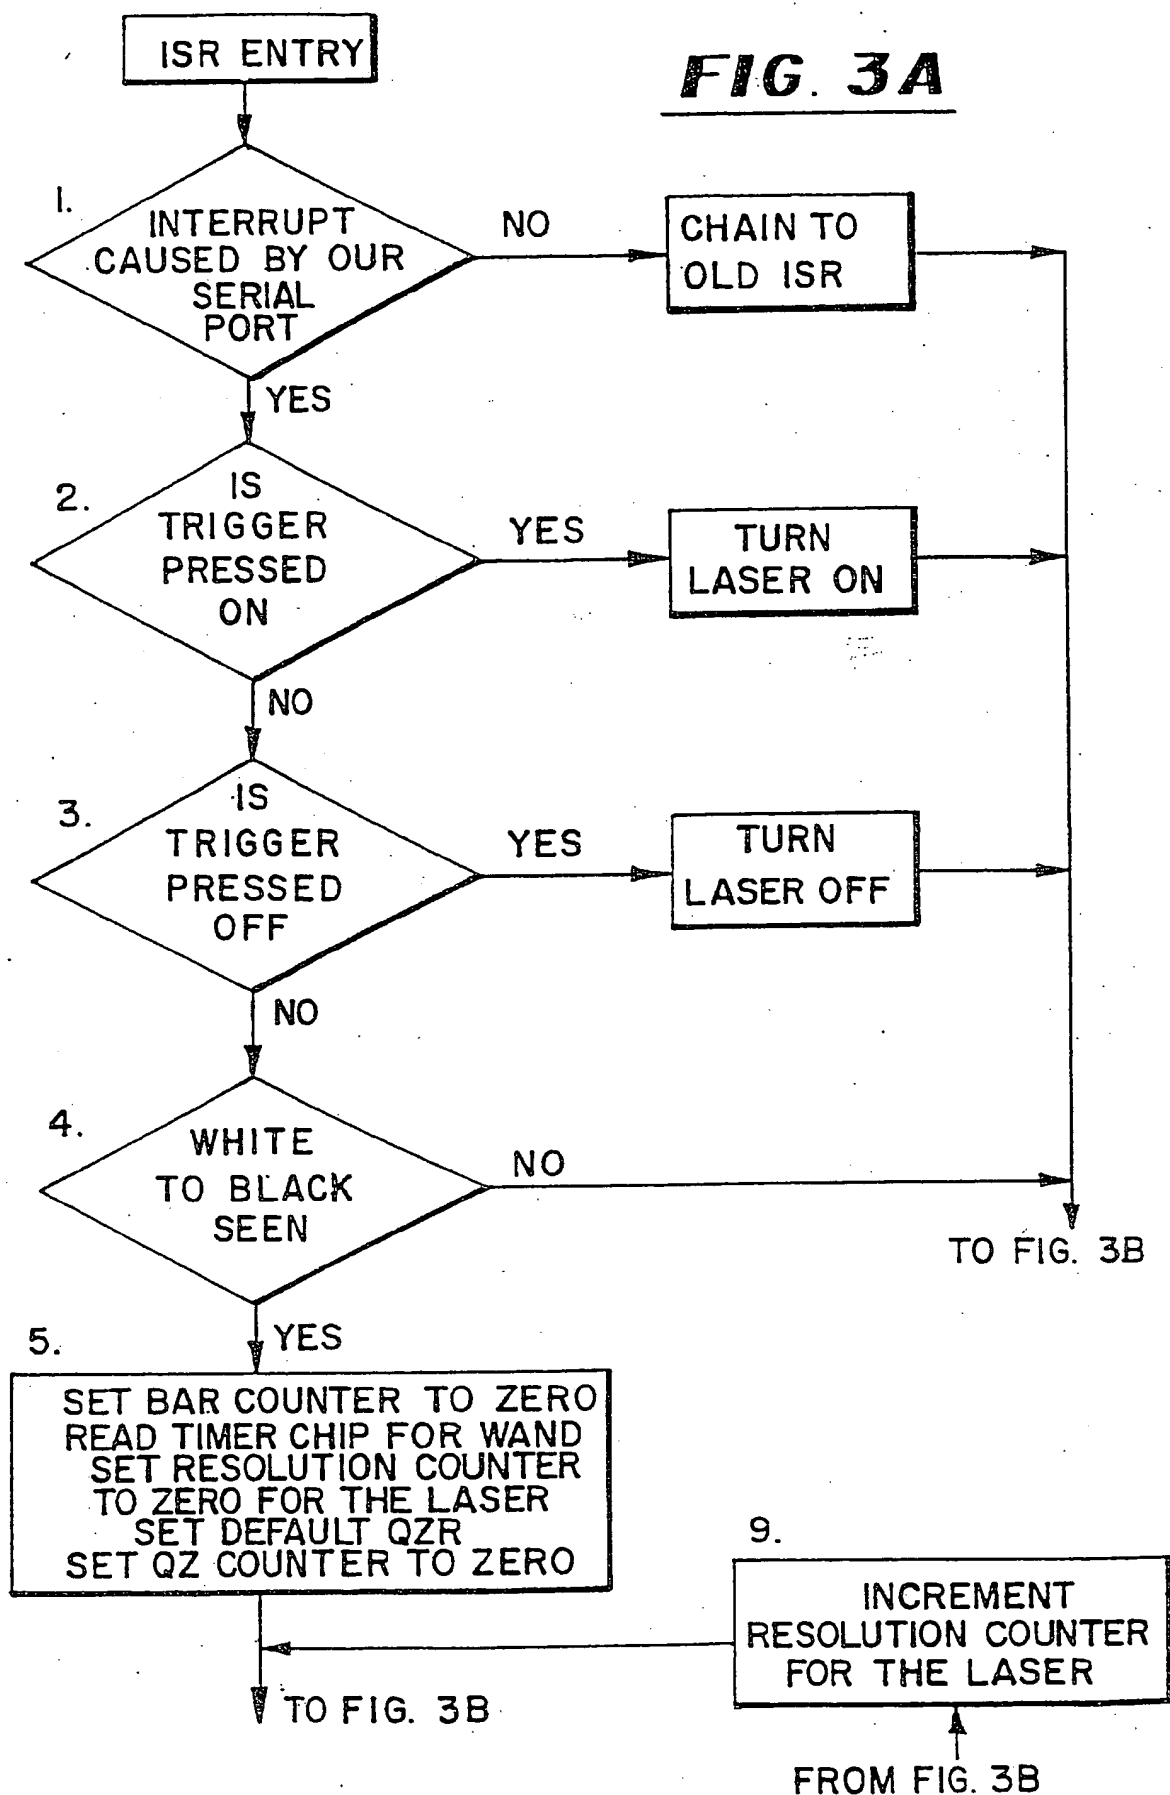
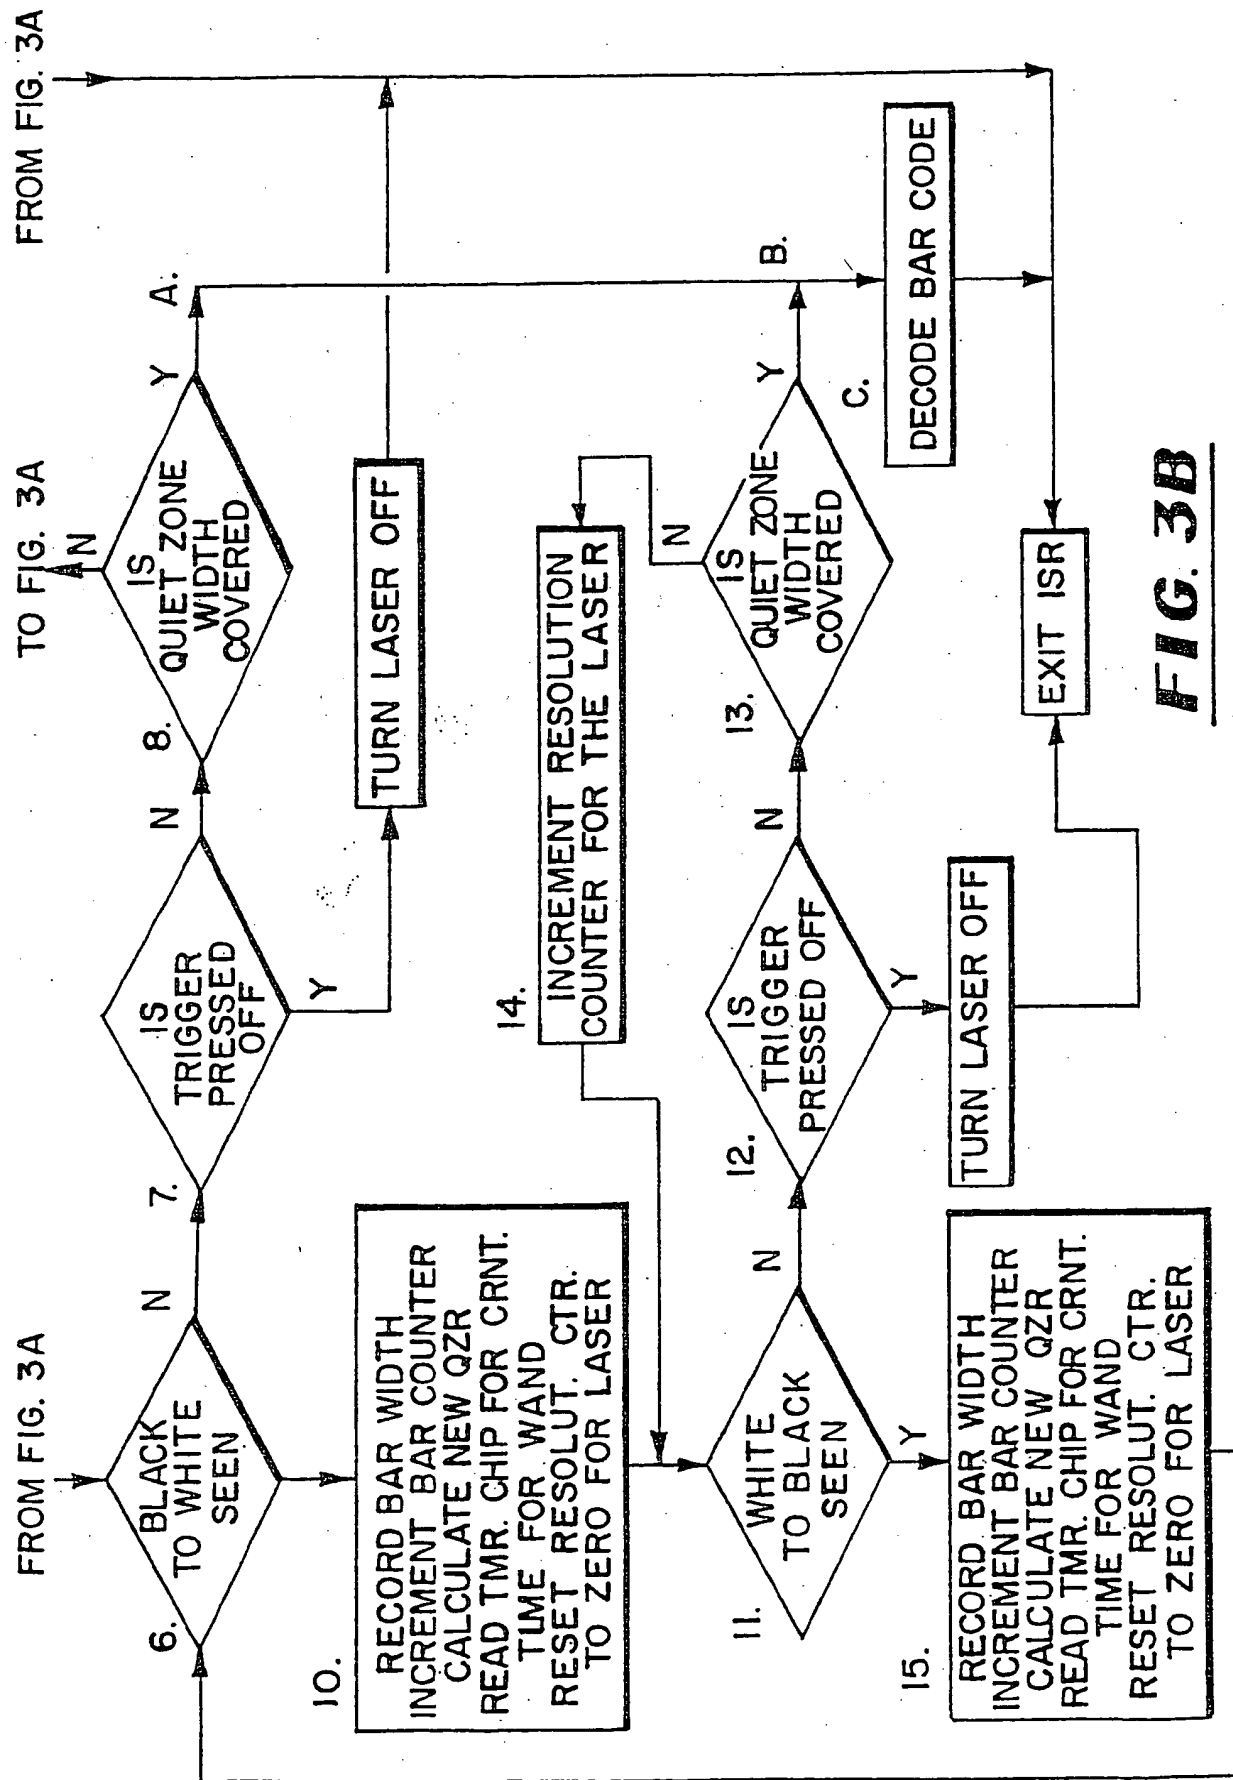
**FIG. 2**

FIG. 3A

**FIG. 3B**

A. CLASSIFICATION OF SUBJECT MATTER

IPC(S) : G06K 7/10

US CL : 235/462, 463, 472, 375, 382, 437, 470; 340/825.31; 380/25

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 235/462, 463, 472, 375, 382, 437, 470, 472, 385; 340/825.31; 380/25

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US, A, 4,860,226 (MARTIN ET AL) 22 August 1989; see col 6, lines 4-52; Fig. 2a, steps 35-37; col 5, line 65 - col 6, line 8; col 4, lines 28-32; Fig. 2b steps 49-54.	1 and 8-9
Y	EP, A, 0 462 772 A2 (TATSURO) 27 December 1991, see col 11, lines 24-39; Fig. 16.	5-7
A, P	US, A, 5,274,567 (KALLIN ET AL) 28 December 1993, Figs. 6 and 9.	1-9
A, P	US, A, 5,245,167 (TAKENAKA) 14 September 1993, see Fig. 2 & abstract.	5-8
A	US, A, 4,941,174 (INGHAM) 10 July 1990, see col 4, line 57 - col 5, line 6.	2-4

☒ Further documents are listed in the continuation of Box C.
 ☐ See patent family annex.

* Special categories of cited documents:	*T	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
A document defining the general state of the art which is not considered to be of particular relevance	*X*	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
E earlier document published on or after the international filing date	*Y*	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*Z*	document member of the same patent family
O document referring to an oral disclosure, use, exhibition or other means		
P document published prior to the international filing date but later than the priority date claimed		

Date of the actual completion of the international search

31 JULY 1994

Date of mailing of the international search report

AUG 08 1994

 Name and mailing address of the ISA/US
 Commissioner of Patents and Trademarks
 Box PCT
 Washington, D.C. 20231

Facsimile No. NOT APPLICABLE

Authorized officer

ESTHER H. CHIN

Telephone No. (703) 308-4809

Form PCT/ISA/210 (second sheet)(July 1992)*

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US, A, 4,460,120 (SHEPARD ET AL) 17 July 1984, col 13, lines 18-29).	9
A	US, A, 5,184,005 (UKAI ET AL) 02 February 1993, Figs. 5 and 7 and abstract.	5-9

Form PCT/ISA/210 (continuation of second sheet)(July 1992)*